


500 Watt Portable **Halogen Work Light** SHL10

ASSEMBLY INSTRUCTIONS

Do not assemble while plugged into power.

1. Insert stand base (1) into other end of tube. Use the stand handle (2) to position the lamp to the desired angle. Insert and tighten angle adjustment knob (3).
2. Lamp angle may be altered simply by loosening the angle adjustment knob (3), moving the stand handle to bring the lamp to the desired angle, then tightening the angle fixing knob.

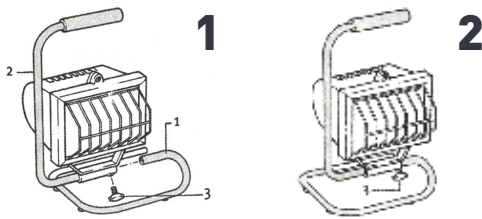


INSERTING OR REPLACING HALOGEN LAMP

Important: Ensure unit is disconnected from power point. Allow time for unit to cool before handling.

1. Unscrew retaining screw on top of lamp. This will release the protective grid, front surround and glass faceplate.
2. Lower front surround down. It will be retained by the hinges.
3. To insert halogen globe, unwrap globe, taking care your fingers do not touch the globe. Use wrapping to handle the globe. Push one end of globe into either of the spring-loaded sockets. Locate other end on other socket, & release.
4. Carefully replace front surround, making sure that it is correctly positioned. Screw up tightly.

Recommended replacement tube is Intex #SHT50, 500 Watt Tungsten Halogen Lamp or similar 118mm long halogen lamps.

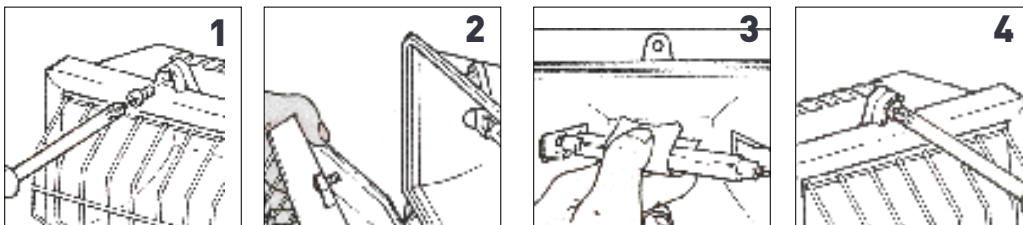

500 Watt Portable
**Halogen
Work Light**
SHL10

WARNINGS

Avoid Electrocution And Burns

- During operation, lamp housing develops high temperatures. Do not touch when in operation. Turn power off and allow unit to cool before touching.
- Do not use in potentially dangerous locations, such as flammable or explosive situations.
- Do not use within 50mm of combustible material.
- Do not plug in this lamp or touch the unit with wet hands or whilst standing on damp ground or water. This may cause electrocution.
- Do not open the lamp when it is on. Turn off and allow time to cool before touching.
- Ensure lamp is plugged into a well maintained weather protected power point.
- Ensure lead and plug are in good condition before use.
- Do not operate with cracked or missing glass face.
- Do not allow children to play in its proximity.

WARNINGS FAILURE TO OBSERVE THE ABOVE SAFETY INSTRUCTIONS
COULD RESULT IN FATAL ELECTRIC SHOCK AND OTHER HAZARDS.

Dual 500 Watt
**Halogen
 Work Light**
 SHL20

ASSEMBLY INSTRUCTIONS

2 x 500 Watt (150 Watt) (TWIN HEAD)

1. Unpack fixture and place all parts on a smooth surface.
2. Mount each of the 2 fixtures to the cross bar in Fig. 1.
 - a. Put the washer between the U bracket of the fixture and the bar to allow the fixture to turn without scratching the bar as shown in Fig. 1.
 - b. Be sure not to over-tighten the adjusting knob.
 - c. Both fixtures can be mounted in the same manner.
3. Mount the fixture assembly bar to the top of the telescope pole by butting one washer on the top of the bar then tighten the centre knob as shown in Fig. 2. Be sure not to over-tighten the centre knob.
4. The tripod legs are adjustable to up or down position by loosening the knob as shown in Fig. 3. Do not adjust the legs by force because they should move easily to desired position.
5. Adjust the telescope pole to desired height by loosening and tightening lock nuts located at the top of each extension as shown in Fig. 4.
6. The fixture is now ready for use.

1 x 500 Watt (150 Watt) (SINGLE HEAD)

Follow the same instructions as 2 X 500W except that point 2 & 3 change to as following:






Mount the fixture assembly to the top of the telescope pole by turning centre knob clockwise until secure as shown in Fig. 5. Do not over-tighten the centre knob.

WARNING

1. This fixture is GS listed and safe when used in a careful manner.
2. Fixture heads get very hot and should not be used within 18" of combustible materials such as paper, cardboard, wood or fabric to avoid starting a fire.
3. Do not use this fixture near combustible materials such as gasoline to avoid explosion. Always unplug the fixture before doing any work or when changing the bulb.
4. In event that you need to move the fixture to the next job site or change a bulb, ample time should be given to cool as fixture head gets very hot.
5. Never point the fixture directly at a person's eyes.
6. Do not touch the halogen bulb when installing it in the fixture as oil from your skin will shorten the bulb life significantly. Best to use a clean cloth to install the bulb.
7. Never touch the fixture when power is on because surface is hot and can cause severe burns.

BULB INSTALLATION

1. Use max. 500W T-3 halogen bulb.
2. Disconnect power and allow bulb to cool prior to installation.
3. Use screwdriver to release the frame and remove old bulb. Push gently toward the right side of the socket until left side is clear from socket and can be removed by moving forward.
4. To install bulb, only use clean gloves or cloth. Fit the bulb into side goes into its socket, allow left end to be inserted into left hand side of socket.
5. Never turn power on with hinge door open.



Dual 500 Watt

Halogen Work Light

SHL20

WARNINGS

Avoid Electrocution And Burns

- During operation, lamp housing develops high temperatures. Do not touch when in operation. Turn power off and allow unit to cool before touching.
- Do not use in potentially dangerous locations, such as flammable or explosive situations.
- Do not use within 50mm of combustible material.
- Do not plug in this lamp or touch the unit with wet hands or whilst standing on damp ground or water. This may cause electrocution.
- Do not open the lamp when it is on. Turn off and allow time to cool before touching.
- Ensure lamp is plugged into a well maintained weather protected power point.
- Ensure lead and plug are in good condition before use.
- Do not operate with cracked or missing glass face.
- Do not allow children to play in its proximity.

WARNINGS FAILURE TO OBSERVE THE ABOVE SAFETY INSTRUCTIONS
COULD RESULT IN FATAL ELECTRIC SHOCK AND OTHER HAZARDS.